


No: 021

Date: 23.08.90

Ref: SERV/GP

Stacking Quad Electrostatic Loudspeakers

The early type ESL,s may be stacked if required. The following information shows a suggested method of mounting using a stacking frame constructed from 'Speedframe' or similar 25 mm square material. It is important that the ESL,s are connected in parallel and we would advise that each speaker is fitted with our clamp protection circuit kit QELCLPK - see TI 001.

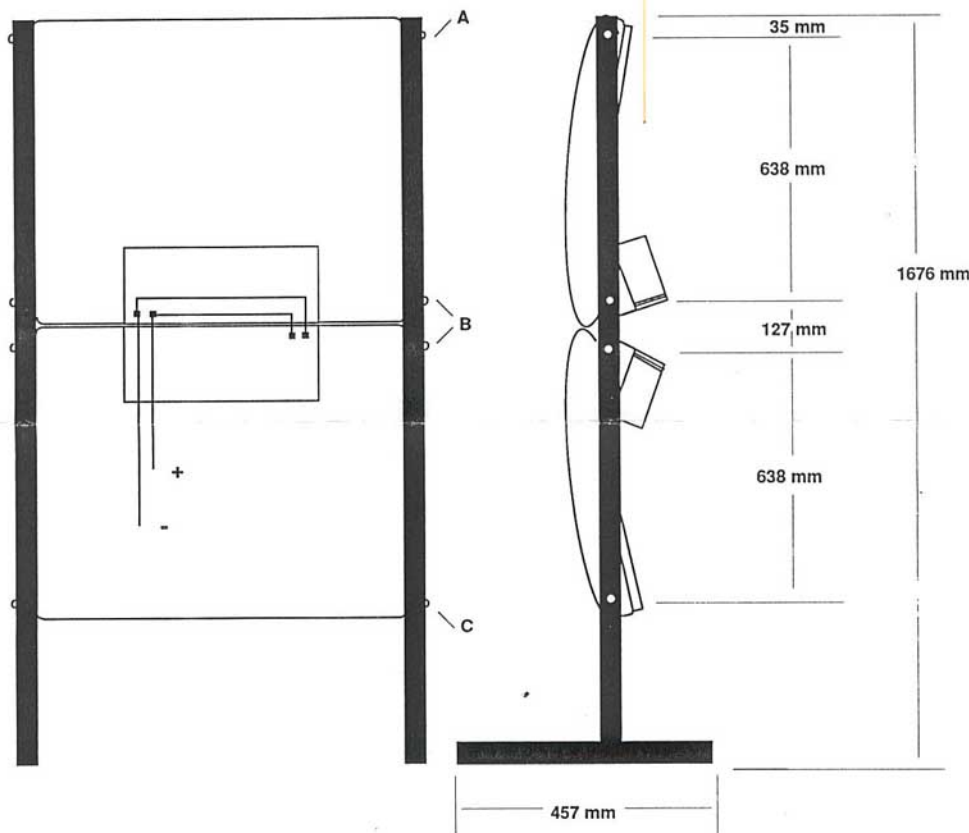

Assembly Suggestions

The polished wood side rails have to be removed to mount in this manner. Drill square tubing to accept the 1.5" No.10 woodscrews (5 mm approx.). In order to assemble fit top ELS first, by top pivot screws (A), and allow speaker to take up position (as shown in diagram) by gravity, Then fix in position with centre screws (B). Mount lower speaker into frame upside down as shown, by the bottom pivot screws (C), and adjust to line up with the upper speaker. Fix in position with the centre screws (B).

Note: Only 0.5" of the fixing screws must be allowed to enter the wooden framework of the ESL's.