
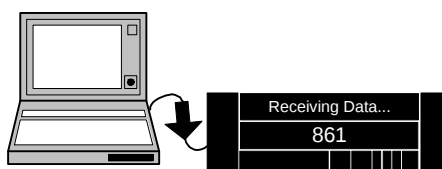
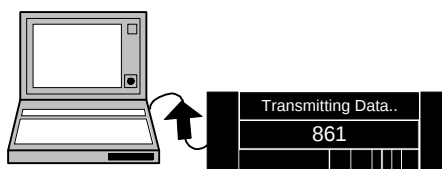
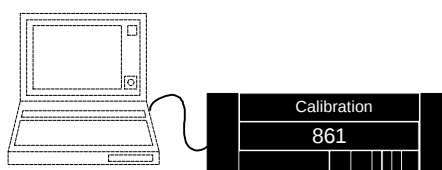
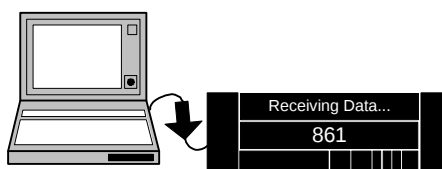
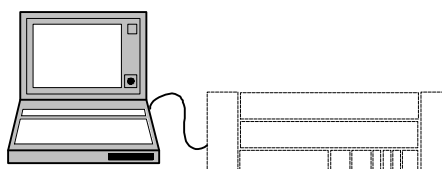


Quick Guide to Setting up 861

1. Install the software with the setup discs.
2. Run the program from the **Start** menu.
3. Select a Serial Port: **View/Options**.
4. Connect the RS232 Cable.
5. **Open** a file for the Type which corresponds most closely to the system: **File/Open**.
6. **Save As** your customer's name: **File/Save As**. This is now the customer's file that you can keep for reference.
7. Go to **861 Surround Controller/Current Settings**. Customise the settings to match the customer's system:
 - a) **Speakers (Layout Only)**
 - b) **Sources**
 - c) and **Setup**
8. Store the settings to the product **File/Store to Products/Current Settings**
9. **Calibrate** the speakers with the 861's Calibration program.
10. Listen to the system and store any Presets required for the customer.
11. Load the calibrated settings back to the computer: **File/Fetch from Products**.
12. Return to **Surround Controller 1**.
13. Click Once on **Current Settings**.
14. Press **Copy as a new user type**.
15. Click on the new User Type.
16. Give this type the Customer's name.
17. Click on **Owner** and type in the customer and other details.
18. **Save** the calibrated settings: **File/Save**
19. **Store** the new Type: **File/Store to Products/All three**.

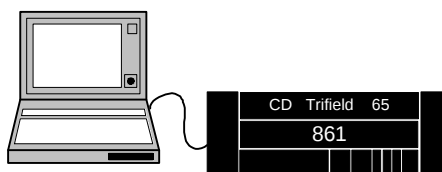

Your calibrated settings are now permanently stored in the product, and the customer can always get back to them using **Type**. You also have the settings stored on the computer for future reference.